

metalfire

| architectural fireplaces |

model URBAN MF 1500-40 G 3S

Dimensions (mm)

- combustion chamber WxDxH 1500 x 370 x 400
- length of burner 1100
- external WxDxH 1500 x 455 x 1675
- fresh air 2 x Ø150

Technical Data (city gas)

for other types of gas see 'gasburner specifications' (options)

- appliance type B11AS/B14AS
- load 19,53 kW
- type of gas/pressure G20/20,25/25mBar
- gascat. I2E+, I2H, I2E, I2L
- weight +/- 174kg

Protection


- 'oxy-pilot'-protection
- ionization-protected pilot-flame
- secured flue pipe discharge
- secured oxygen supply

Specifications

- control unit below burner
- finishing: heat-resistant black paint
- lockable valve for fresh air and smoke gases
- grey pebbles
- remote control with electronic ignition

Options

- obligatory chimney fan RSVG 250 or 315 :
- type depending on situation
- for further info contact the Metalfire dealer
- back combustion chamber finishing:
 - ribbed cast-iron
 - ceramic woodlogs
 - convection jacket (see options)

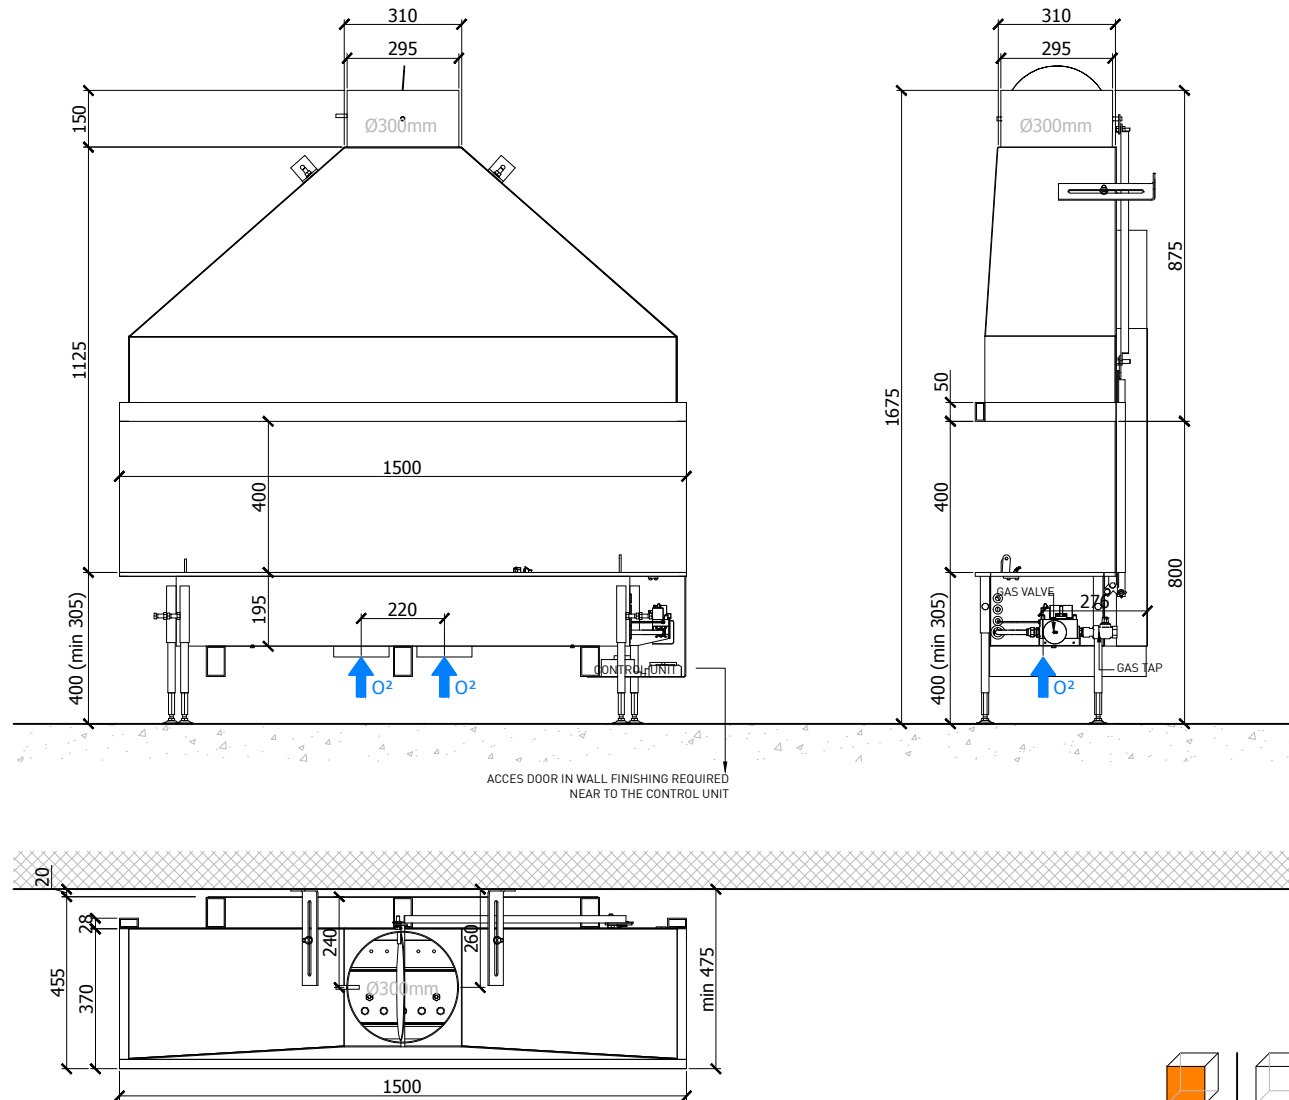

scale 1:20

www.metalfire.eu

EN 509 CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice